

# *EMI Modeling of a 32-bit Microcontroller in Wait Mode*

*Jean-Pierre Leca<sup>1,2</sup>, Nicolas Froidevaux<sup>1</sup>, Henri Braquet<sup>2</sup>, Gilles Jacquemod<sup>2</sup>*  
*<sup>1</sup>STMicroelectronics, <sup>2</sup>LEAT, UMR CNRS-UNS 6071*

**BMAS 2010**

**San Jose, California, USA**




Thursday, September 23

- 1. Motivations**
- 2. EMI Background**
- 3. EMI Modeling**
- 4. Results and correlation**
- 5. Conclusion**

# 1. Motivations



**EMI:** Disturbances that affect an electrical circuit due to either EM conduction or EM radiation. EMI is a major concern for modern electronic devices.

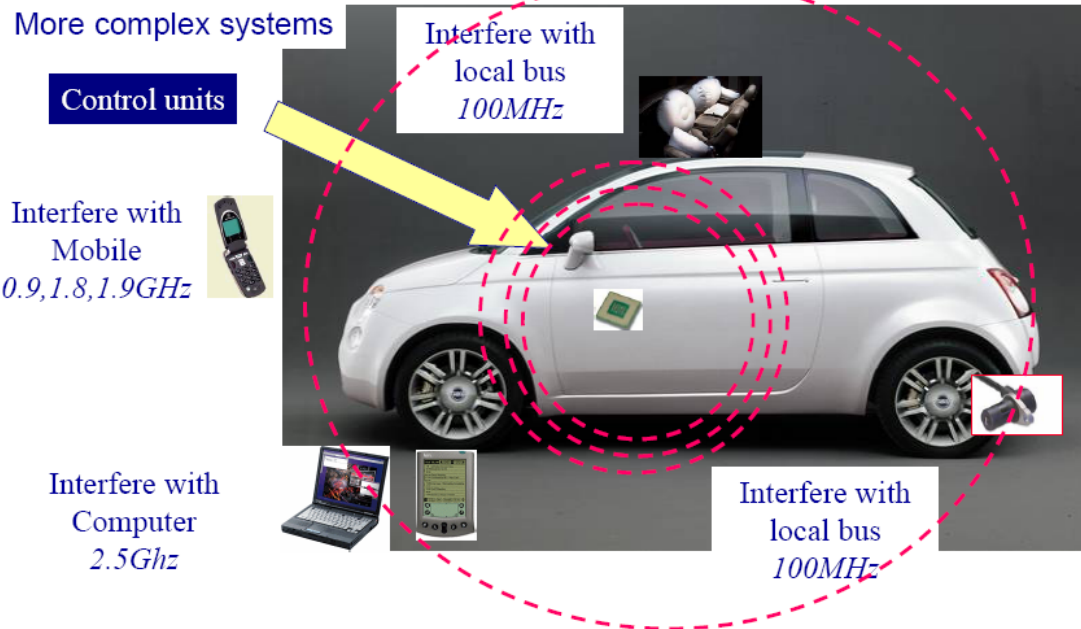


## Why?

- ❖ EMI are generally increasing with the shrink of CMOS technology & the rise of products' performances.
- ❖ Products must be IEC 61967-2 or SAE J1752/3 compliant.
- ❖ Marketing argument (automotive, medical, GPS...).
- ❖ To save time, money, and gain market share.

# 1. Motivations



## How?

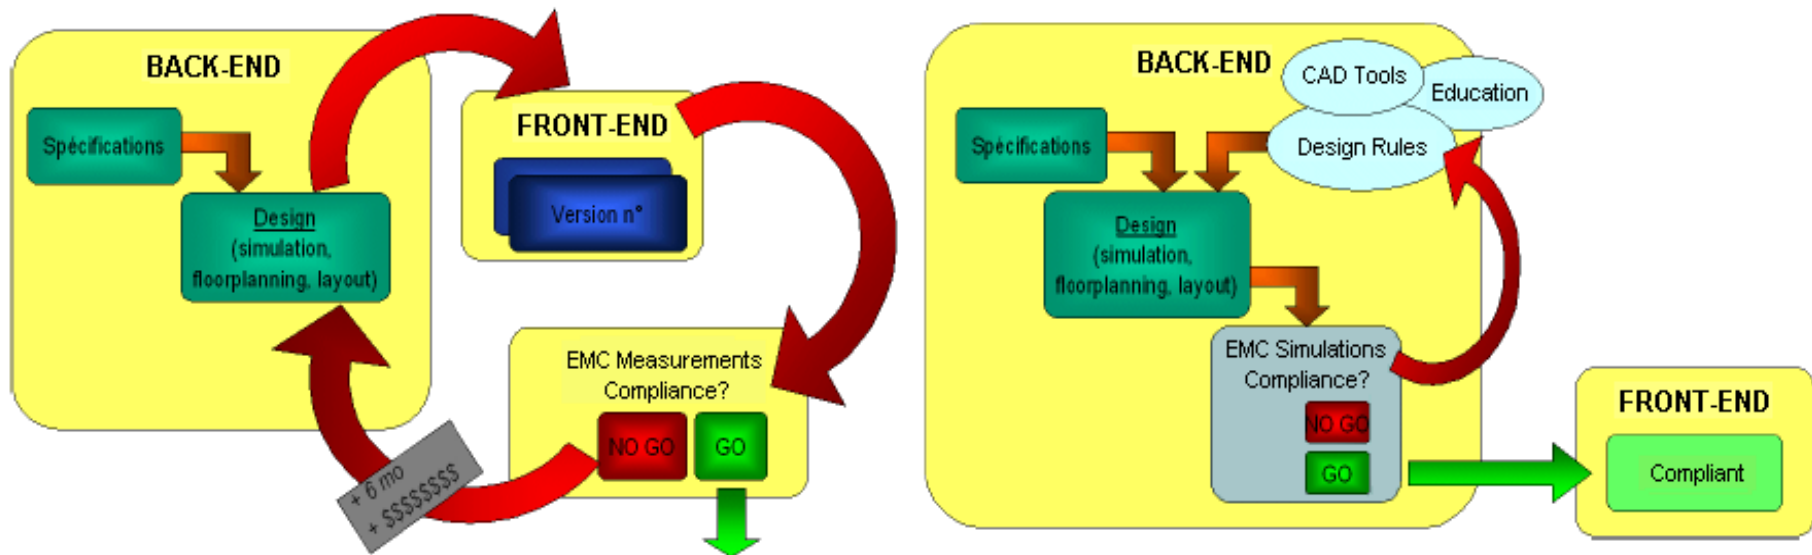


- ❖ Before we were expected, now we want to act.
- ❖ Define EMI strategy during the design stages by:
  - Use of predictive EMI models.
  - Layout/Design rules implementations during the product design flow.

# 2. Background



## Basic EMI mechanisms:

- ◆ Noise generation due to switching currents created by:
  - Clock-driven blocks, synchronized digital core
  - Accesses to the memories (Flash, RAMs, ...), I/O switching activity
- ◆ AC currents converted into P/G voltage drops (common mode radiation): SSN for « Simultaneous Switching Noise » due mainly to the wires parasitic inductances **EM Field Creation**
- ◆ P/G current loops (differential mode radiation) **EM Field Creation**
- ◆ Unintentional EMI radiation by miniature antennas (lead frames, interconnections...)
- ◆ Intentional or unintentional receivers can then pick up these EM waves

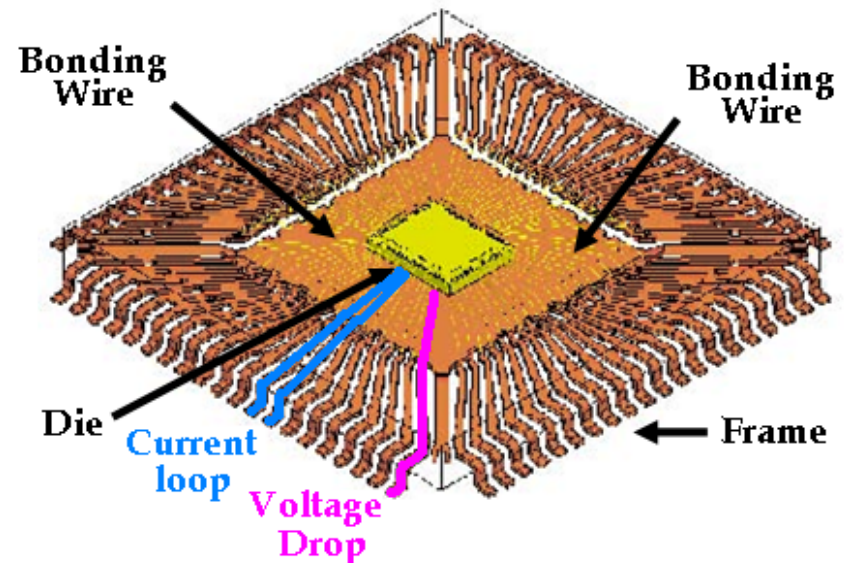





# 2. Background



## EMI measurements:

- ◆ Based on IEC 61967-2 standard:
  - ❑ Dedicated EMI printed circuit board
  - ❑ Help of a TEM-Cell as an EMI receiver
  - ❑ Results visible on a spectrum analyzer

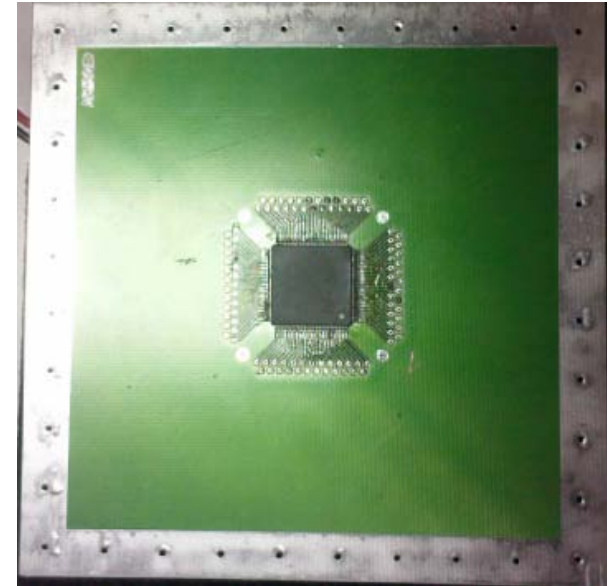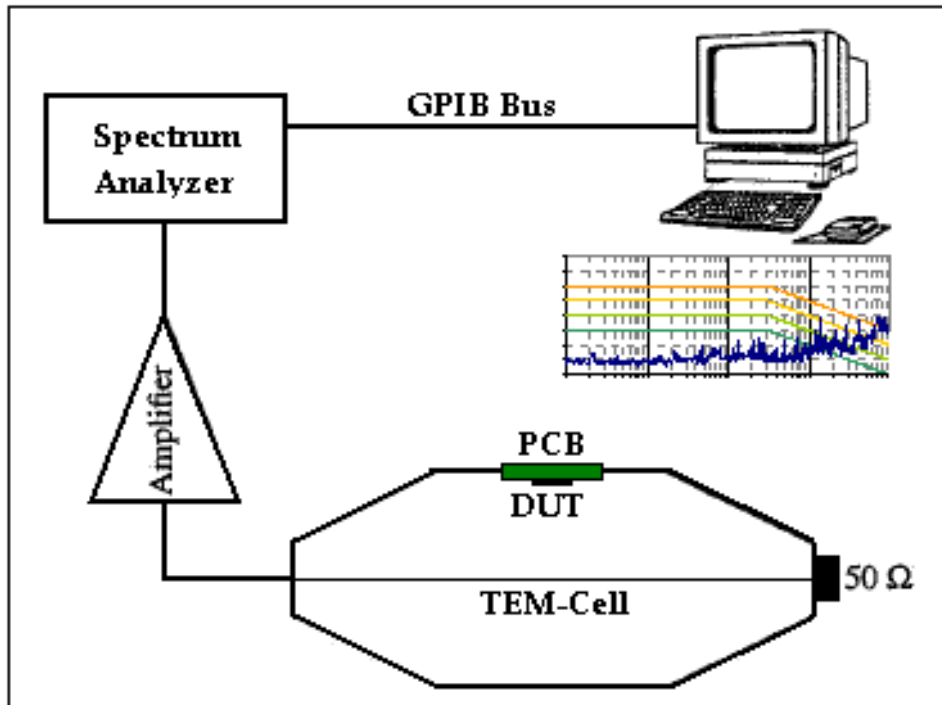


## 2. Background



### Measurement results:

- 32-bit STXX running in **Normal** mode ( $f_{\text{OSC}}=8\text{MHz}$  &  $f_{\text{PLL}}=24\text{MHz}$ ):

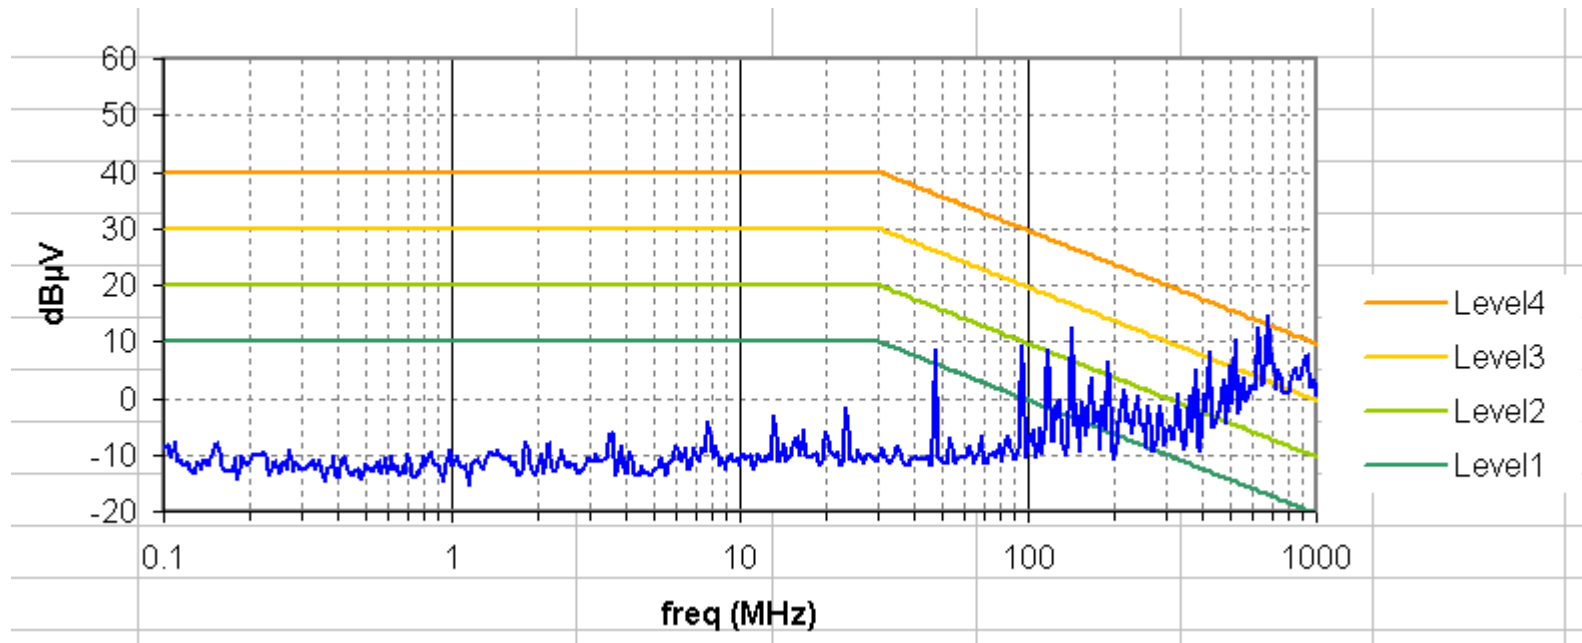


- ❑ SAE level of 5 (Not recommended in applications).
- ❑ Main CPU clock enabled and accesses to the FLASH memory.
- ❑ Resonance @ 660MHz.

## 2. Background



### Measurement results:

- 32-bit STXX running in WFI mode ( $f_{osc}=8\text{MHz}$  &  $f_{PLL}=24\text{MHz}$ ):

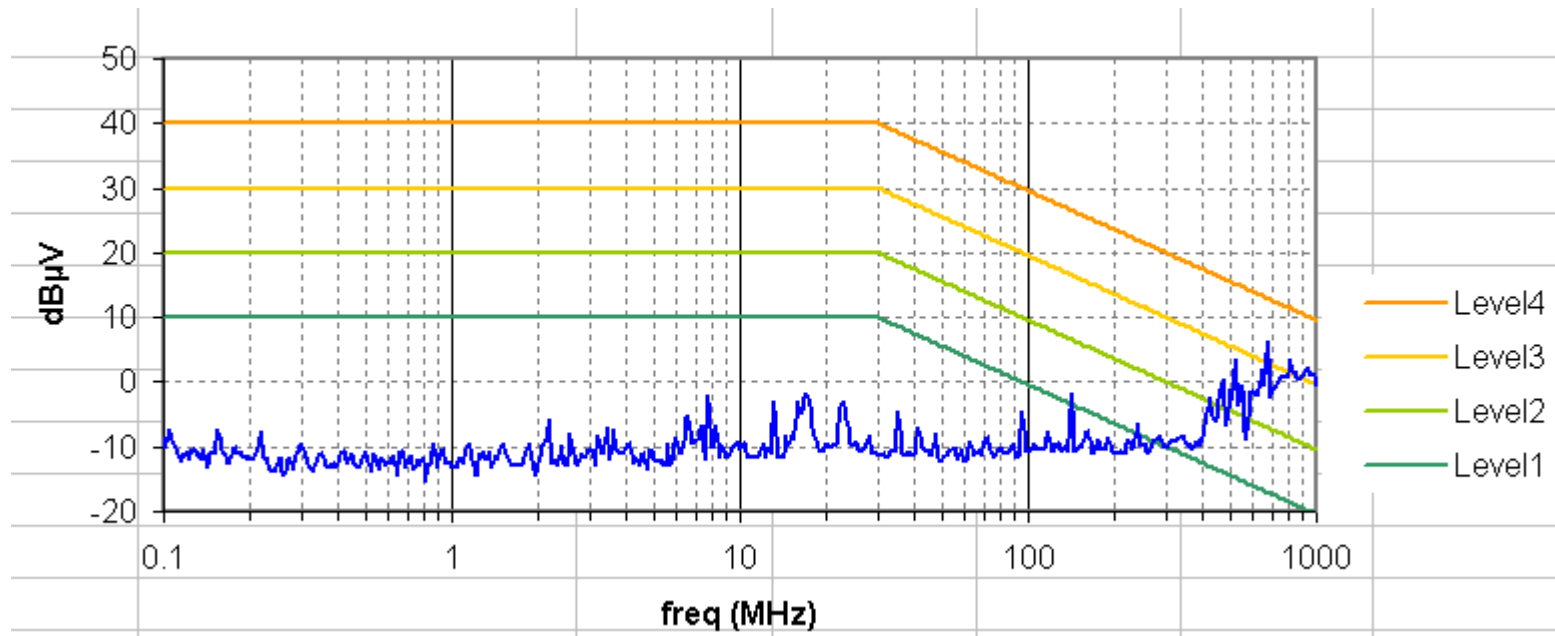

- ❑ SAE level of 4 (High EMI risk in applications).
- ❑ Main CPU clock and FLASH memory disabled.
- ❑ Resonance @ 660MHz.




# 3. EMI Modeling



## Modeling methodology:

- ◆ Based on the ICEM, for « Integrated Circuits Emission Model », standard (IEC 62014-3).
- ◆ Goal:
  - To predict EMI level during the design stages.
  - To test different design/layout solutions.

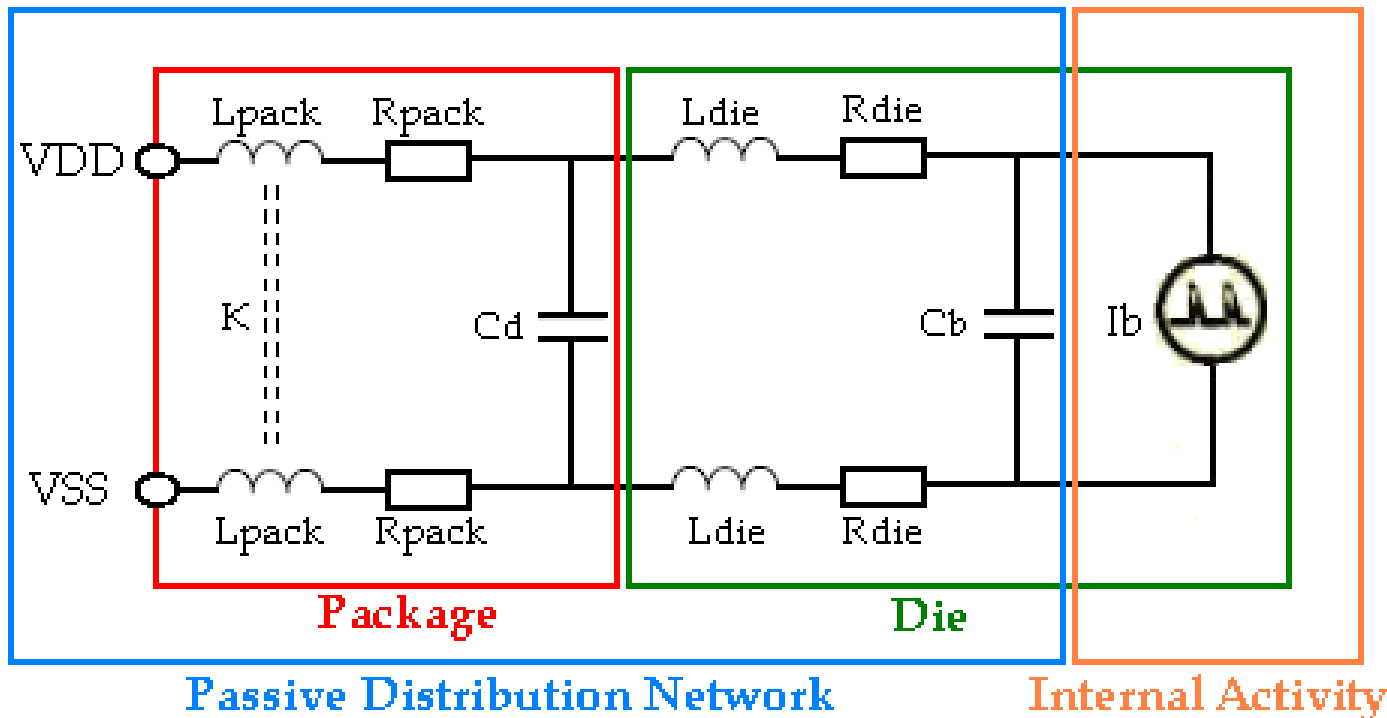

# 3. EMI Modeling



## ST Microcontroller modeling:

### ◆ Main noise generators:

□ FLASH memory.

□ 1.8V Digital core.

□ Crystal Oscillator, PLL, extracted clock tree.


Normal Mode

Wait Mode

## ST Digital Core model:

◆ PWL current source


◆ On-die admittance

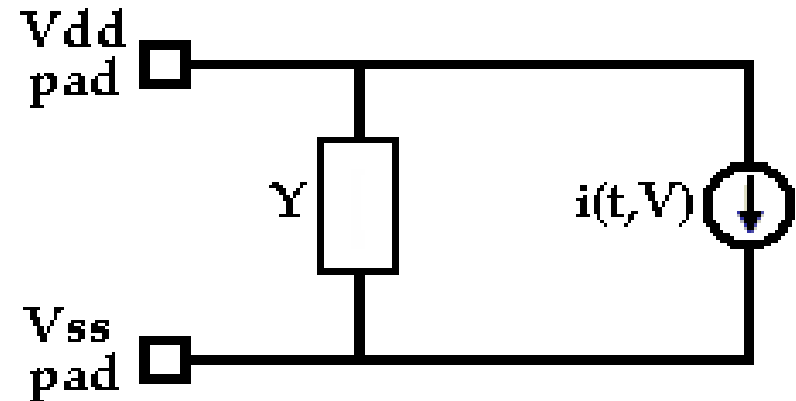

# 3. EMI Modeling




- ❖ RedHawk-CPM Principle:
  - ❑ On-chip P/G network => RLC mesh
  - ❑ Switching instances => PWL sources  $i(t, V)$  after standard cells characterization
  - ❑ Non-switching instance => decaps, ESR

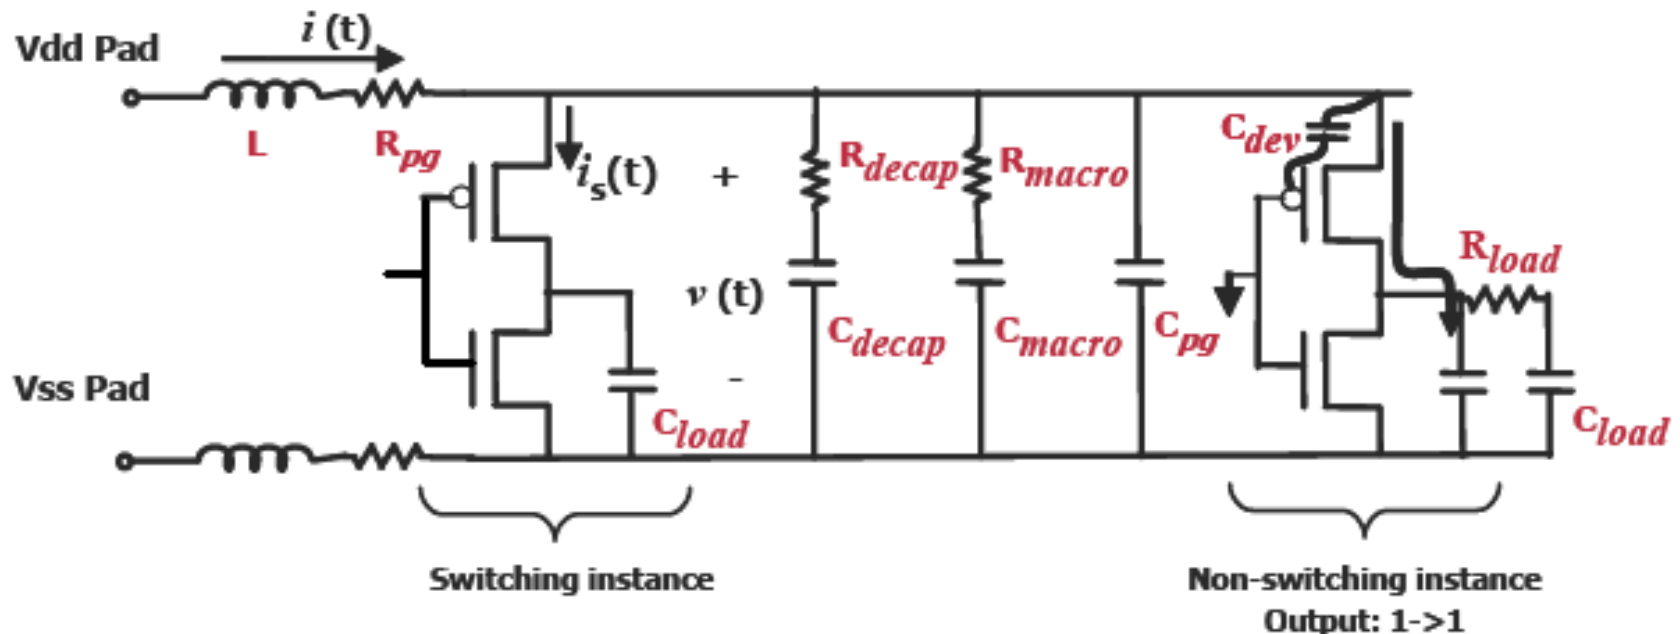

# 3. EMI Modeling



## ST Apache-CPM flow:

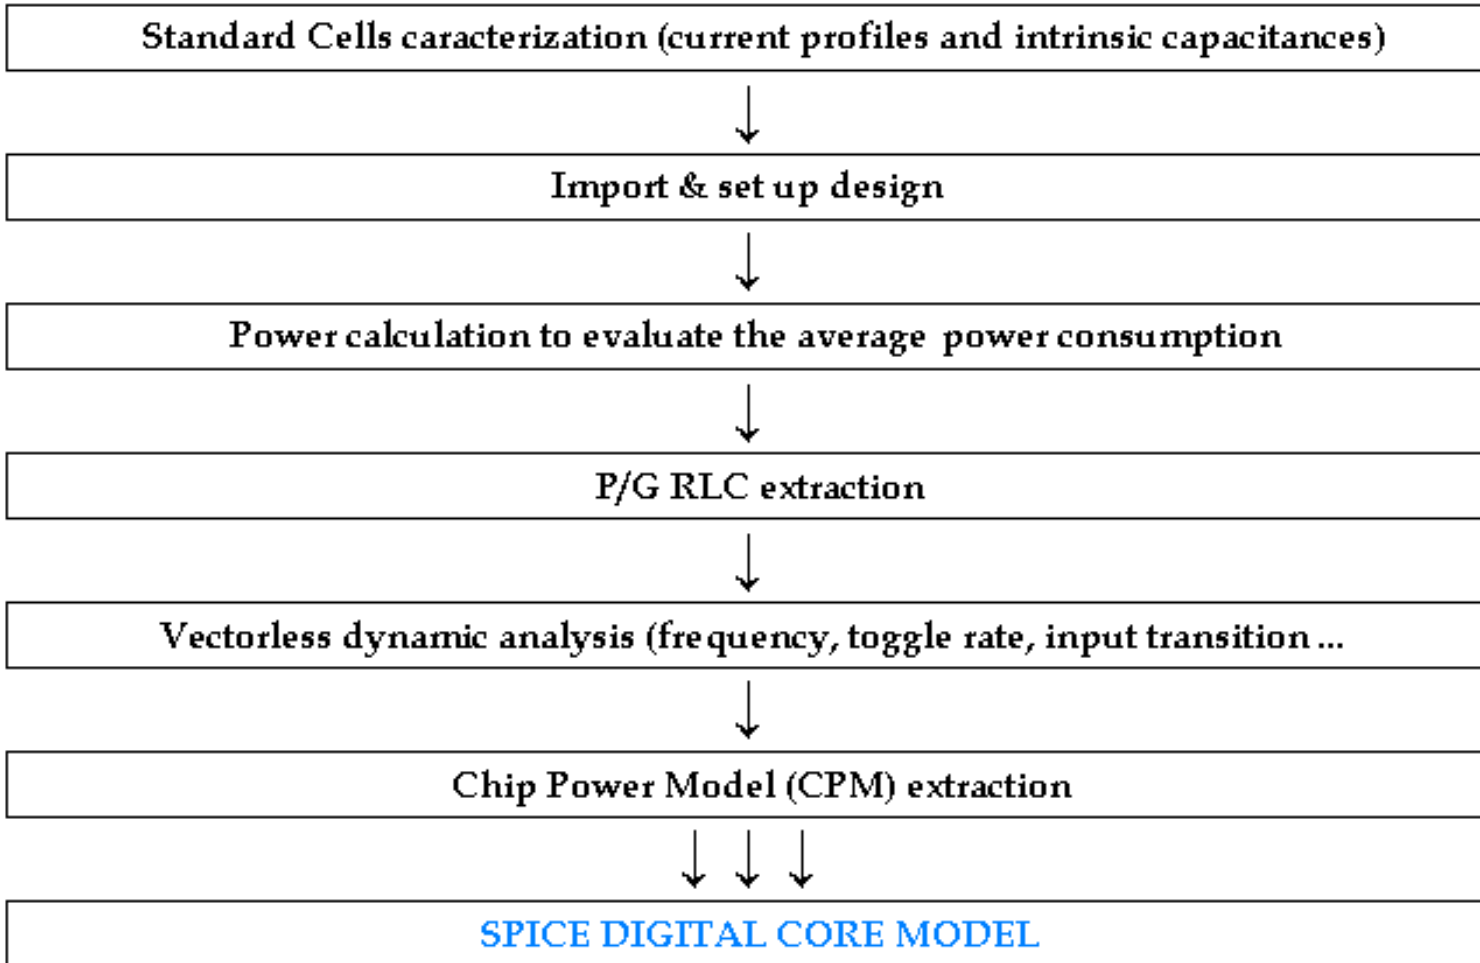


❖ Needs: .tech, .lib, .cdl, .gds2, .def, .lef ...

# 3. EMI Modeling



## Microcontroller WFI model:

- ❖ WFI mode: Memories and digital core disabled – **Simulated Model**.
  - ❑ Best case for the EMI
  - ❑ SAE level = 4
  - ❑ Modeling possible in SPICE.
- ❖ Three main parts:
  - ❑ Die model (noise generator + on-die PDN).
  - ❑ Package model (off-die PDN).
  - ❑ TEM-Cell model (receiver PDN).

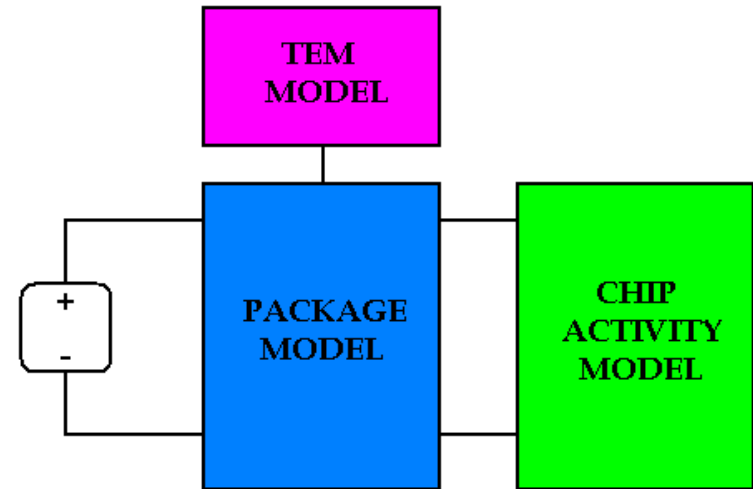



# 3. EMI Modeling



## Die model:

Noise Generator


- ❖ Noise generator constituted by:
  - ❑ 8MHz crystal oscillator and 8 to 24MHz PLL.
  - ❑ 3.3V to 1.8V regulator.

On-die Power Distribution Network

- ❖ Internal capacitances between the supply rails (by estimation, post-layout extraction or simulation).
- ❖ Wires inherent inductances and resistances.
  - ❑ Tracking of the supply rails from the product gds2.
  - ❑ Inductances and resistances computation (no skin-effect and mutual inductance in this model).

$$R_{RAIL} = R_O \frac{l}{w}$$

$$L_{RAIL} = l \frac{\mu_0 \mu_r}{2\pi} \ln\left(\frac{4h}{w} + 1\right)$$

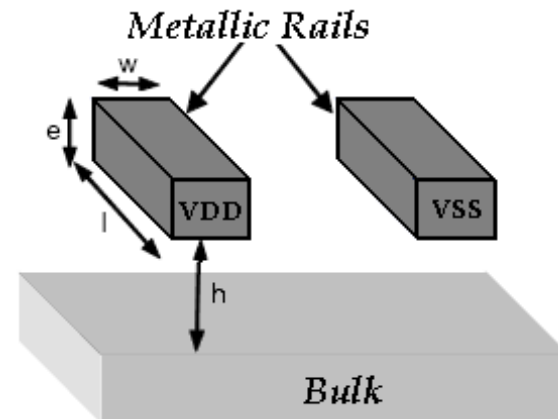


# 3. EMI Modeling



## ST Package Model:



- STXX 100-pin LQFP bonding diagram:
  - Long bonding wires => important inductances.
  - Need also to add the inductance due to the lead frames.

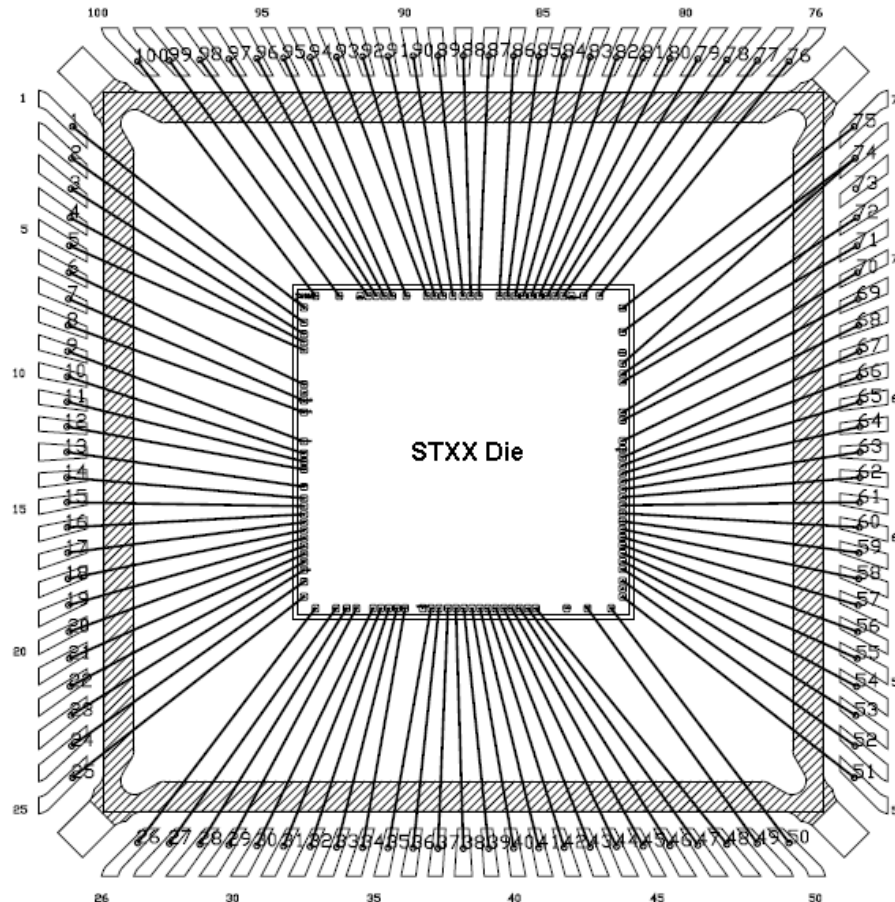

# 3. EMI Modeling



- ❖ Model obtained with Ansoft Q3D and HFSS:
  - ❑ Each supply couple is modeled.
  - ❑ Valid up to 1GHz.
  - ❑ RLCK network.

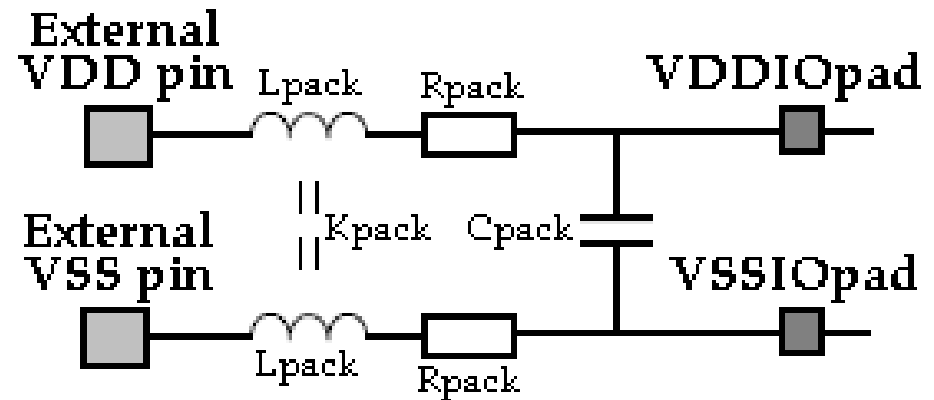
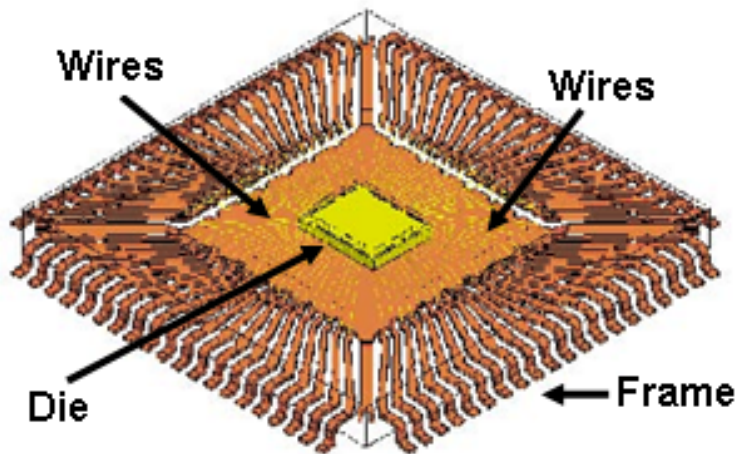


# 3. EMI Modeling



## TEM-Cell Model:


- Obtained with an EM solver:
  - Representation of the electric and magnetic coupling between the chip and the TEM-Cell septum
  - Valid up to 1GHz
  - RLCK network

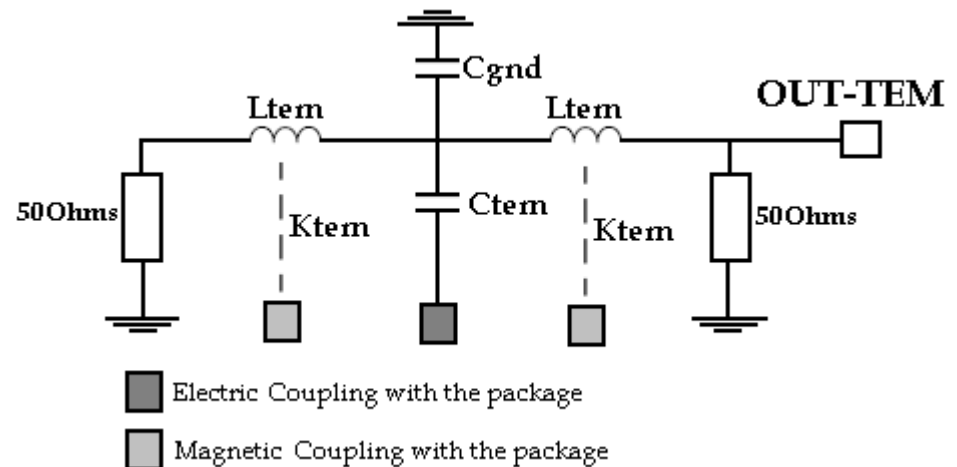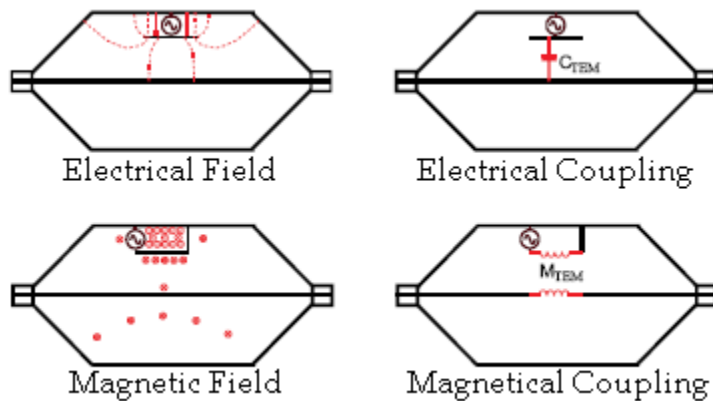


# 3. EMI Modeling



## TEM CELL

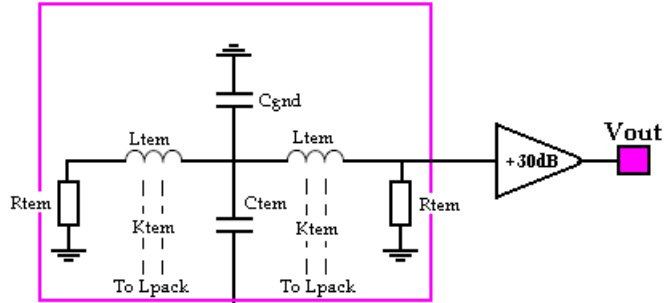

- Product pins
- Output to the analyser
- Internal Pad
- IP integrated in product

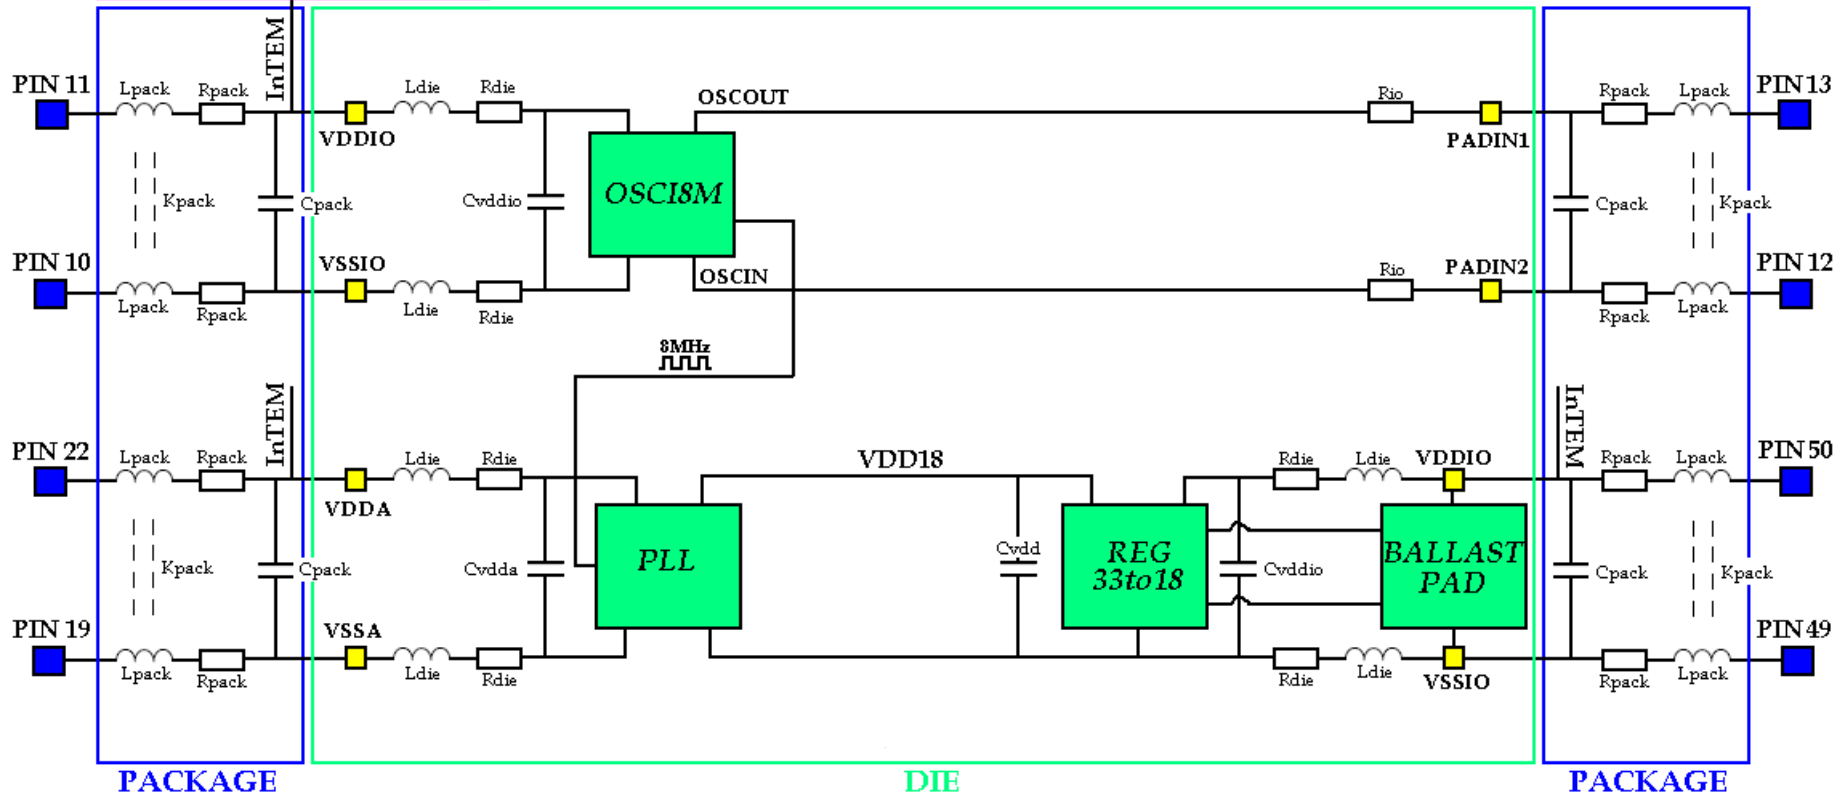



# 4. Results and correlation




## Comments on the model:

- ◆ In this model:
  - ❑ Only the voltage drops are modeled.
  - ❑ The current loops are not modeled.
  
- ◆ SPICE simulation with ELDO:
  - ❑ External 8MHz quartz (with its capacitances)
  - ❑ PLL with a factor x3
  - ❑ PVT conditions: Typical process,  $V_{DDIO}=3.3V$  &  $V_{CORE}=1.8V$ ,  
 $T^{\circ}=27^{\circ}C$
  
- ◆ Good correlation with WFI measurement (see next figure)
  - ❑ Similar amplitude peaks.
  - ❑ EMI at the same frequencies (harmonics + resonances)
  - ❑ Effect of the position of the chip visible.


# 4. Results and correlation





Radiated EMI Measured on STXX in Wait Mode @ 24MHz

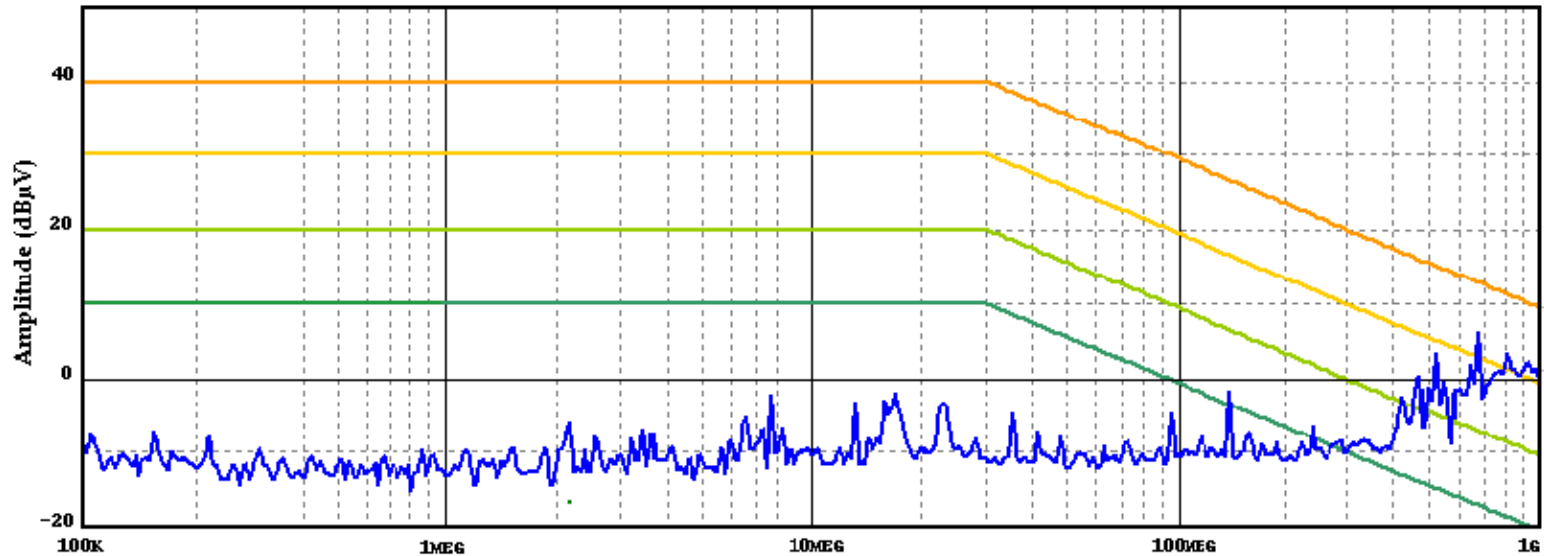

Radiated EMI Simulated on STXX in Wait Mode @ 24MHz

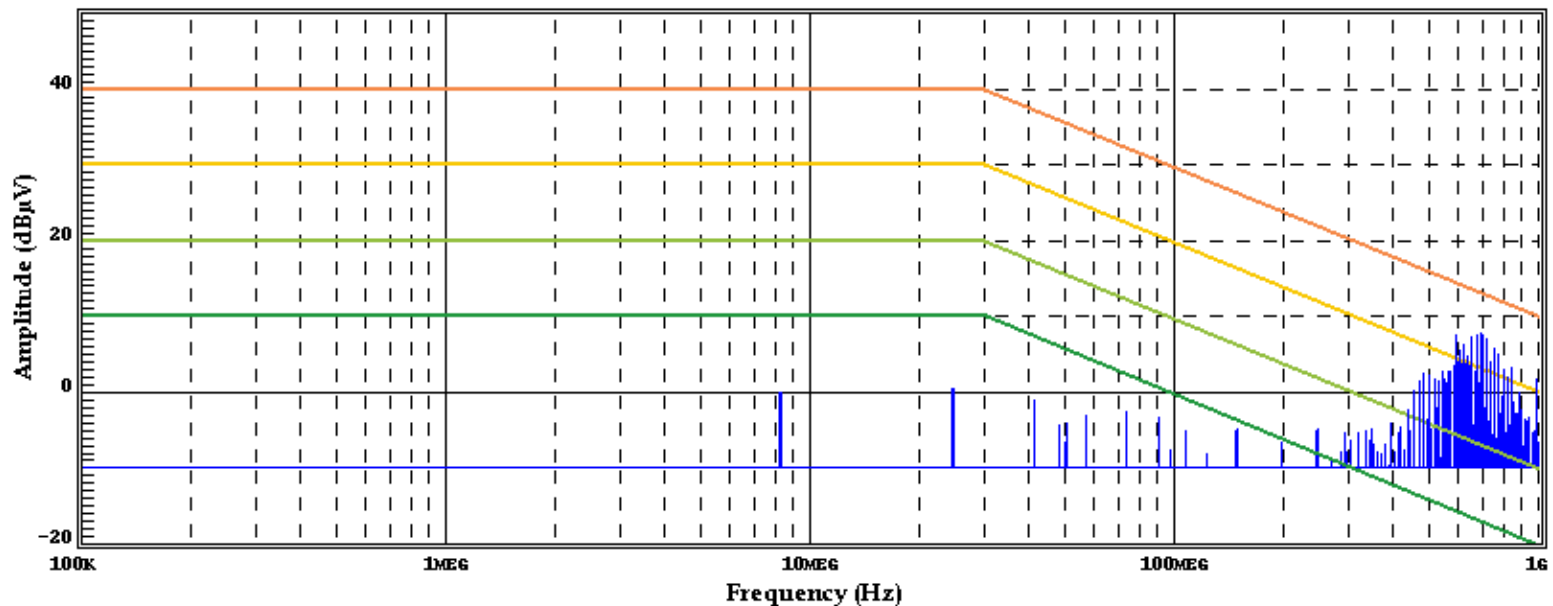

# 4. Results and correlation

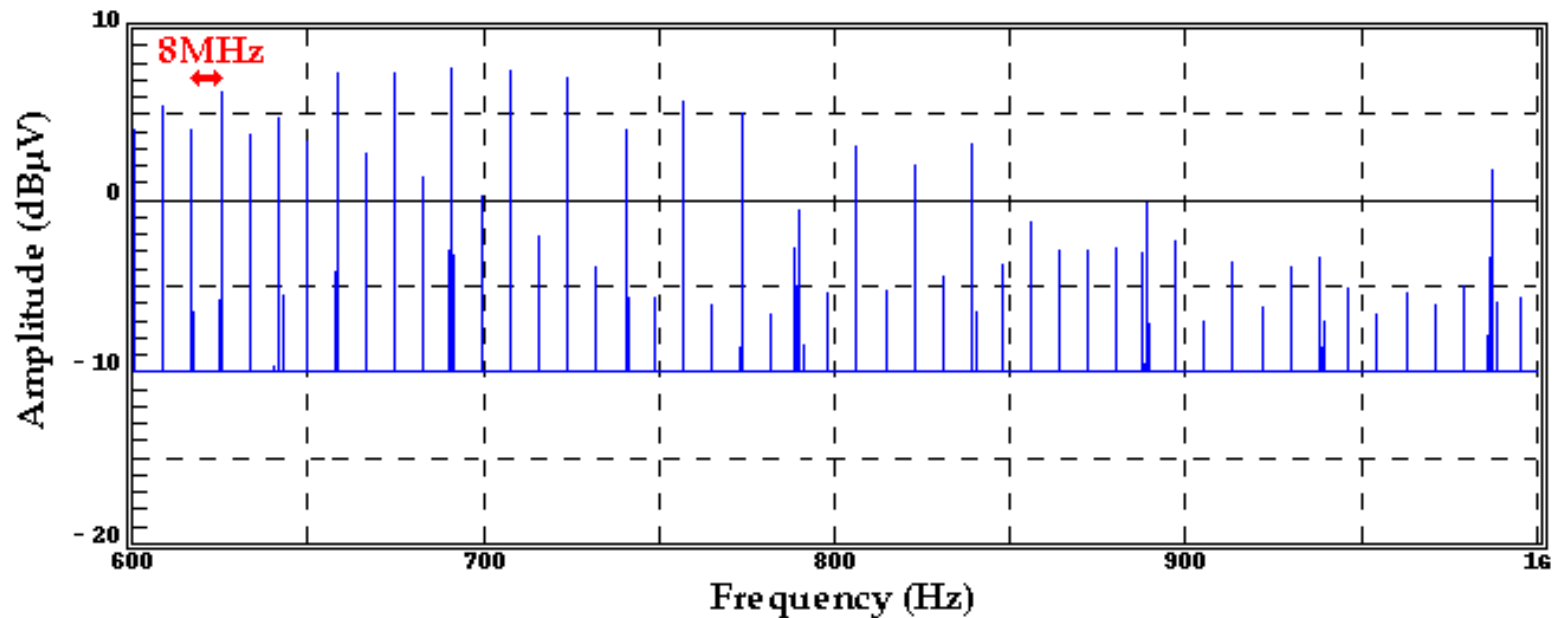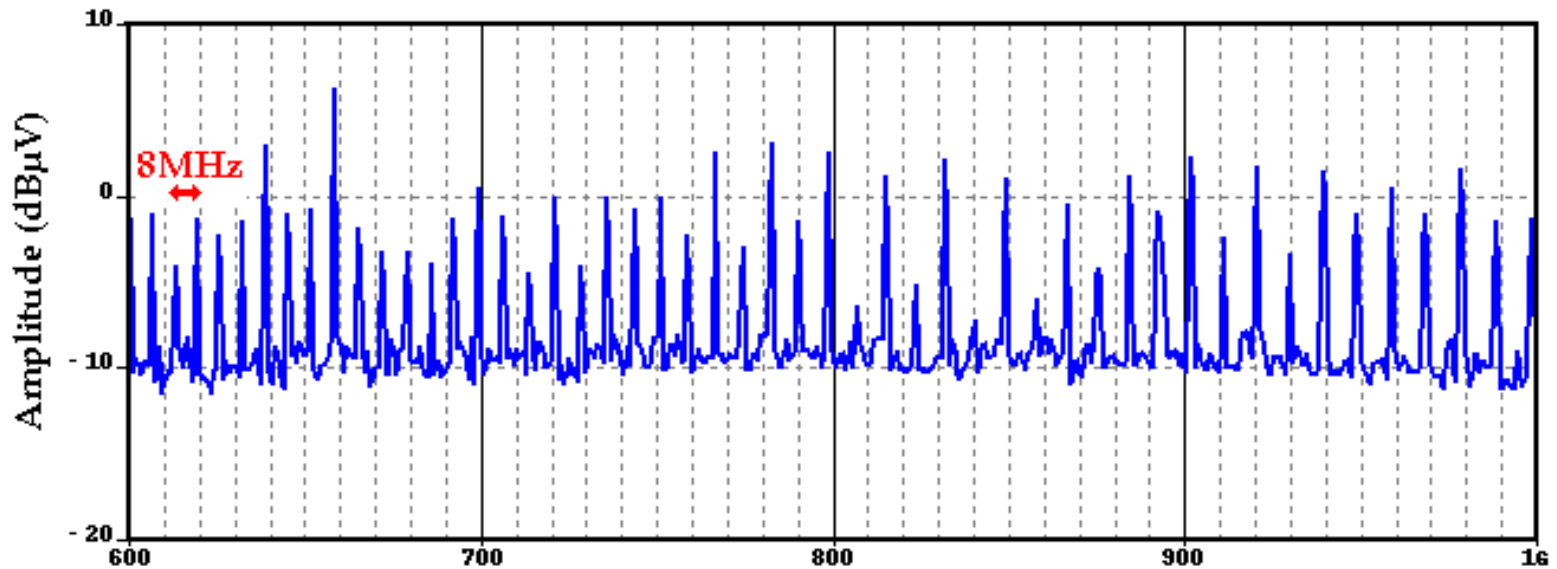

# 4. Results and correlation



## Comments:

- ◆ Resonance frequency near 660MHz:
  - ❑ Observable behavior in measurement and simulation.
  - ❑ The SSN on supplies is a damp sine wave in the time domain.
  - ❑ In the frequency domain, RLC filter effect due mainly to:
    - ❑ The package inductance
    - ❑ The capacitance between the supplies
  - ❑ Effect of the on-die resistance (Q and BW)

$$f_c = \frac{1}{2\pi\sqrt{LC}}$$

$$Q = \frac{L2\pi f_c}{R}$$

$$\Delta f = \frac{f_0}{Q}$$

- ◆ **Conclusion:** an EMI level of 4 when the chip is running in a WFI mode could be predicted during the design stage.

# 5. Conclusion



## Performances:

- ◆ Good EMI prediction.
- ◆ Good EMI mechanisms representation.
- ◆ Quite simple to put in place.

## Limitations:

- ◆ Only apply to the WFI mode.
- ◆ Long simulation time (~15 hours).

## Future improvements:

- ◆ Add others running modes by modeling the digital core and the Flash memory.



**Thank you for attention!**